



Removing the start and stop sentinels from the encode data string in QuikCard

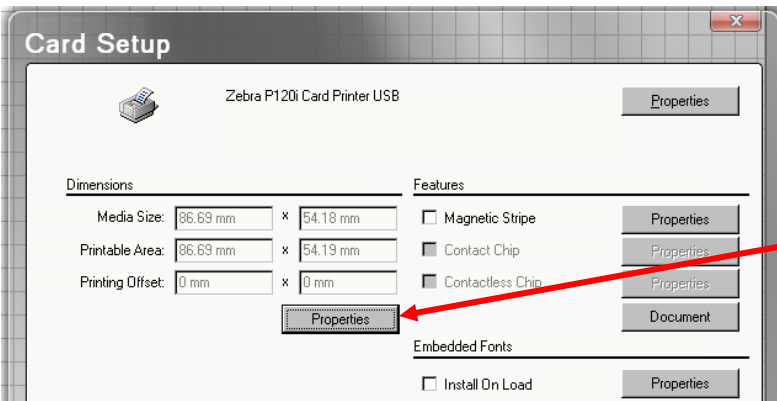


1. Within QuikCard click on "File" in the menu bar and then click on "Card Setup" in the drop down menu.

2. In the Card Setup window, click on the "Properties" button under "Dimensions"

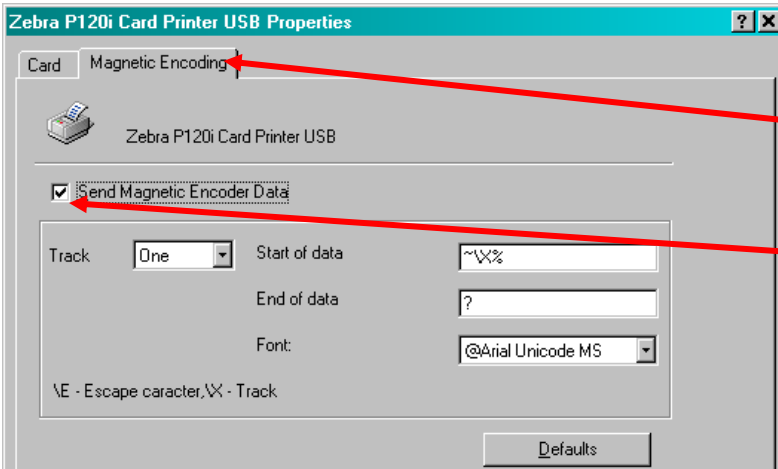


3. Select the "Magnetic Encoding" tab and ensure that "Send Magnetic Encoder Data" box is checked.

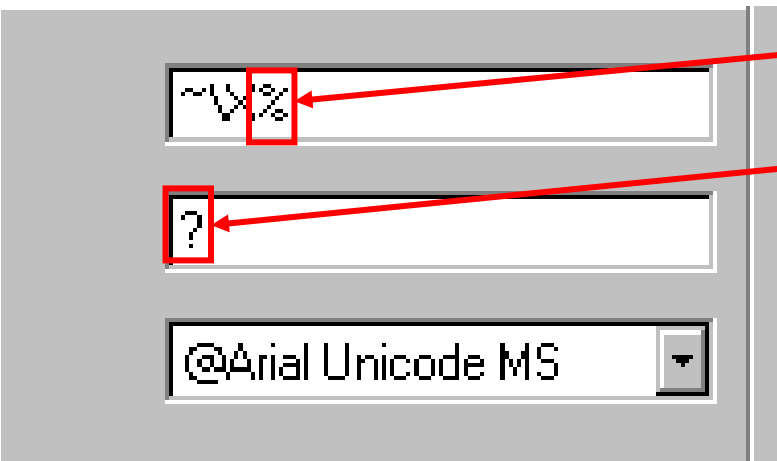

4. Remove the Start Sentinel (trk1"% trk2";) from the Start of data box

5. Remove the Stop Sentinel "?" from the End of data box

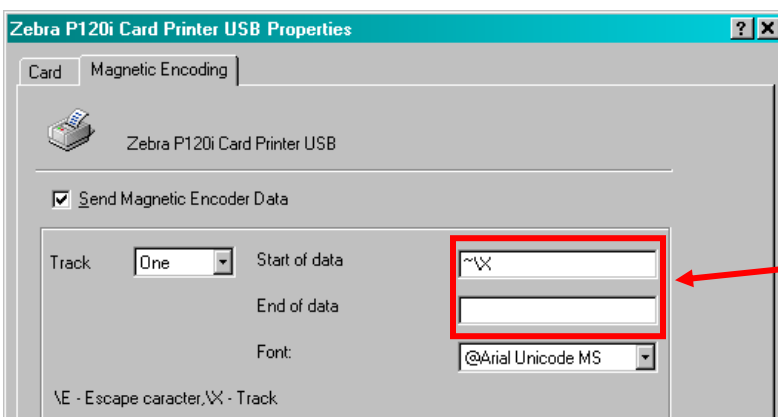

6. Select Tracks 2 and 3 and repeat steps 4 and 5 so the Start of data and End of data for all three tracks looks like this.