

Table 5 • Print Settings (Continued)


Ribbon Low Mode	<p>The Ribbon Low feature determines if the print engine will generate a warning when the amount of ribbon left on the roll gets low.</p> <p>When the Ribbon Low feature is off, the output signal (Pin 9) does not function, the LOW RIBBON warning is not displayed, and the print engine continues to print until it runs out of ribbon.</p> <p>When the Ribbon Low feature is enabled, output signal (Pin 9) on the applicator port is functional. When the amount of ribbon on the supply spindle gets low, the output signal asserts to provide a RIBBON LOW warning. Set the output signal to assert HIGH or LOW.</p> <p><i>Accepted values:</i></p> <ul style="list-style-type: none"> • ENABLED • DISABLED <p><i>Related ZPL command(s):</i> ^JJ</p> <p><i>SGD command used:</i> none</p> <p><i>Control panel menu item:</i> RIBBON LOW MODE -</p> <p><i>Printer web page:</i> none</p>
Ribbon Low Output	<p>When the Ribbon Low feature is enabled, this parameter determines if the output signal on Pin 9 is HIGH or LOW.</p> <p><i>Accepted values:</i></p> <ul style="list-style-type: none"> • ACTIVE HIGH • ACTIVE LOW <p><i>Related ZPL command(s):</i> none</p> <p><i>SGD command used:</i> device.applicator.ribbon_low</p> <p><i>Control panel menu item:</i> RIBBON LOW OUTPUT</p> <p><i>Printer web page:</i> none</p>
Reprint Mode	<p>When reprint mode is enabled, you can reprint the last label printed by pressing and holding PAUSE + CANCEL on the printer's control panel.</p> <p><i>Accepted values:</i></p> <ul style="list-style-type: none"> • ON • OFF <p><i>Related ZPL command(s):</i> ^JZ</p> <p><i>SGD command used:</i> none</p> <p><i>Control panel menu item:</i> REPRINT MODE on page 34</p> <p><i>Printer web page:</i> N/A</p>



Set Applicator Error Signal When Print Engine Pauses

When this option is enabled and the print engine is paused, the print engine sets the applicator error state.

See [Error on Pause](#) on page 80 for more information.

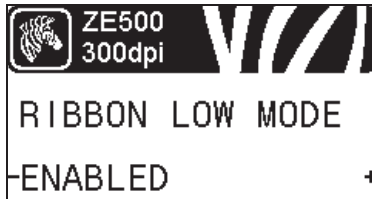

Set the **Ribbon Low Mode**

The Ribbon Low feature determines if the print engine will generate a warning when the amount of ribbon left on the roll gets low.


See [Ribbon Low Mode](#) for more information.



Set the **Ribbon Low Output**

When the Ribbon Low feature is enabled, this parameter determines if the output signal on Pin 9 is HIGH or LOW.

See [Ribbon Low Output](#) for more information.

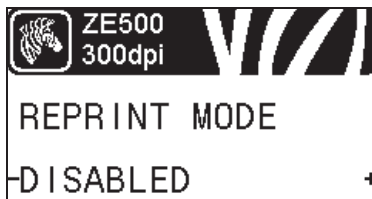

Set the Reprint Mode

When reprint mode is enabled, you can reprint the last label printed either by issuing certain commands or by pressing the **LEFT ARROW** on the control panel.

See [Reprint Mode](#) on page 81 for more information.