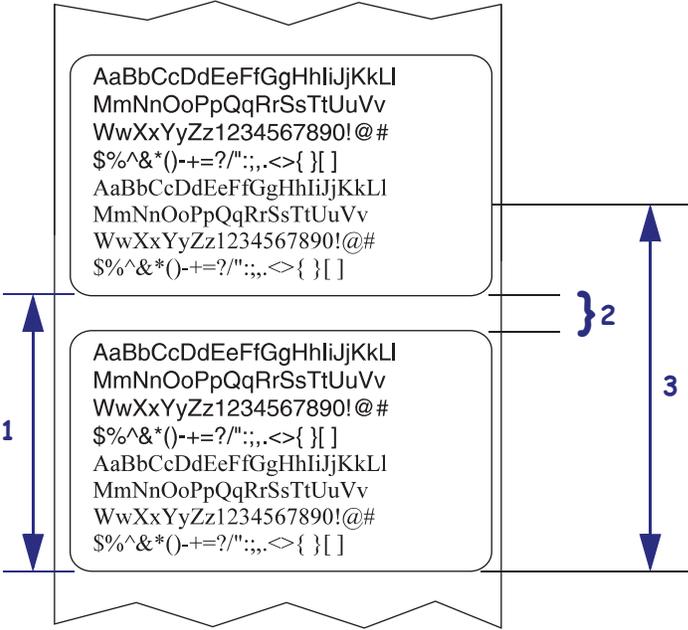


Table 8 • Printer Parameters (Sheet 5 of 22)

Language/Parameter	Action/Explanation						
 <p>MAXIMUM LENGTH -39.0 IN 988MM</p>	<p><b>Set Maximum Label Length</b></p> <p>This parameter is used during the media portion of the calibration process. <b>Always set maximum label length to a value that is at least 1.0 in. (25.4 mm) greater than the actual label length (Figure 15).</b> If the value is set to a smaller value than the label length, the printer assumes that continuous media is loaded, and the printer cannot calibrate.</p> <p>For example, if the label length is 5.0 inches (126 mm) including the interlabel gap, set the parameter for 6.0 inches (152 mm). If the label length is 7.5 inches (190 mm), set the parameter for 9.0 inches (229 mm).</p>						
<p style="text-align: center;"><b>Figure 15 • Label Length</b></p>  <table border="1" data-bbox="618 1390 1377 1507"> <tr> <td style="text-align: center;"><b>1</b></td> <td>Label length (including interlabel gap)</td> </tr> <tr> <td style="text-align: center;"><b>2</b></td> <td>Interlabel gap</td> </tr> <tr> <td style="text-align: center;"><b>3</b></td> <td>Set maximum label length to approximately this value</td> </tr> </table>		<b>1</b>	Label length (including interlabel gap)	<b>2</b>	Interlabel gap	<b>3</b>	Set maximum label length to approximately this value
<b>1</b>	Label length (including interlabel gap)						
<b>2</b>	Interlabel gap						
<b>3</b>	Set maximum label length to approximately this value						
<p><i>Default Value:</i> 39.0 inches (988 mm)</p> <p><i>Selections:</i> Values are adjustable in one-inch (25.4 mm) increments</p> <p><b>To change the value shown:</b></p> <ol style="list-style-type: none"> <li>1. Press PLUS (+) or MINUS (-) to change the value shown.</li> </ol>							
 <p>*SUPPLIES WARNING -DISABLED +</p>	<p><b>Set Supplies Low Warning</b></p> <p>When this feature is enabled, the printer provides a warning when the media or ribbon level is low.</p> <p><i>Default Value:</i> DISABLED</p> <p><i>Selections:</i> ENABLED, DISABLED</p>						